

# JACE 9000 controller

## PRODUCT DEFINITION

The JACE® 9000 is a compact, embedded IoT (Internet of Things) controller and server platform for connecting multiple and diverse devices and sub-systems. With internet connectivity and web-serving capability, the JACE 9000 controller provides integrated control, supervision, data logging, alarming, scheduling and network management. It streams data and rich graphical displays to a standard web browser via an Ethernet or wireless LAN, or remotely over the internet.

The licensing model for the JACE 9000 controller is simplified and features standard drivers, along with optional IO and field bus expansion modules for ultimate flexibility and expandability. The JACE 9000 controller operates with Niagara 4, the latest version of the Niagara Framework®, for optimum performance. In larger facilities, multi-building applications and large-scale control system integrations, Niagara 4 Supervisors can be used with JACE controllers to aggregate information, including alarms, and historical and real-time data, to create a single, unified application.



## HARDWARE SPECIFICATIONS

|   |
|---|
| 1.6GHz NXP iMX8M+ Quad Core CPU   |
| 2GB LPDDR4 RAM  |
| 8GB onboard EMMC storage  |
| 8GB micro-SD card (backup media)  |
| Wi-Fi (Client or WAP) <ul style="list-style-type: none"> <li>• Wi-Fi 5 (802.11ac)</li> <li>• 1x1 802.11 a/b/g/n/ac</li> <li>• Configurable radio (Off, WAP, or Client)</li> <li>• WPA2PSK/WPA3PSK supported</li> <li>• Only available for wireless model</li> </ul> |
| USB type C connector <ul style="list-style-type: none"> <li>• Debug port</li> </ul>   |
| (2) isolated RS-485 with selectable bias and termination  |
| (2) 10/100/1000MB Ethernet ports  |
| Secure boot   |
| *Supply requirements: 24VAC rated at 24VA minimum, or 24VDC rated at 1A (24W) minimum   |
| Non-Wi-Fi: Supports Niagara 4.13 and later<br>Wi-Fi: Supports Niagara 4.15 and later  |
| Real-time clock   |
| Batteryless   |

*\*VYKON Enterprise Security requires four hours of standby power*

## ORDERING INFORMATION: SOFTWARE & SOFTWARE MAINTENANCE

JACE 9000 non-Wi-Fi is available with a Niagara 4.13 or higher software license and Tridium's standard drivers. JACE 9000 Wi-Fi is available with a Niagara 4.15 or higher software license and Tridium's standard drivers. Purchase of a software maintenance agreement (SMA) is required with initial JACE licensing. The initial SMA is for 18 months, with extended agreements of 3 years and 5 years available for discounted rates.

Note: An active Software Maintenance Agreement (SMA) is required for a Niagara instance to run the latest version of Niagara. When SMA expires, the licensed version will remain at the version that's in effect at time of the expiration. To upgrade, the requisite maintenance terms (1-year, 3-year, 5-year) are required to bring the SMA expiration date to current or future date.

## ORDERING INFORMATION: VYKON INTEGRATED ANALYTICS

VYKON Integrated Analytics is a data analytics extension to the Niagara Framework available on JACE 9000 controllers. 25 VYKON Integrated Analytic points are included with every JACE 9000 license. VYKON Integrated Analytics licenses are conveniently and cost-effectively based on the number of analytical points and do not expire. Your Software Maintenance Agreement covers all VYKON Integrated Analytics enhancements, adding to the value of the SMA.

### key features

- Data analysis at the onsite JACE controller level
- Real-time on-premise analytic control

| Part number   | Description   |
|---------------|---|
| NA-EC-N4-100  | VYKON Integrated Analytics Framework (on Niagara 4) license for 100 analytic points for an Embedded Controller (JACE)   |
| NA-EC-N4-250  | VYKON Integrated Analytics Framework (on Niagara 4) license for 250 analytic points for an Embedded Controller (JACE)   |
| NA-EC-N4-500  | VYKON Integrated Analytics Framework (on Niagara 4) license for 500 analytic points for an Embedded Controller (JACE)   |
| NA-EC-N4-1000 | VYKON Integrated Analytics Framework (on Niagara 4) license for 1,000 analytic points for an Embedded Controller (JACE) |

Find additional data sheets for  
VYKON Integrated Analytics  
on VYKON's website

# EXPANSION MODULE AND IO CONFIGURATIONS

## MAXIMUM EXPANSION (MODULES SUPPORTED)

- NPB-8000-LON (4)
- NPB-8000-232 (4)
- NPB-8000-2X-485 (2)

## MAXIMUM IO (MODULES SUPPORTED)\*


- IO-R-16 (16)\*
- IO-R-34 (8)\*

*\*See JACE IO R data sheet for configuration details*

## MAXIMUM VYKON ENTERPRISE SECURITY (MODULES SUPPORTED)\*

- SEC-R2R\*
- SEC-RIO\*

*\*16 total each or combined*

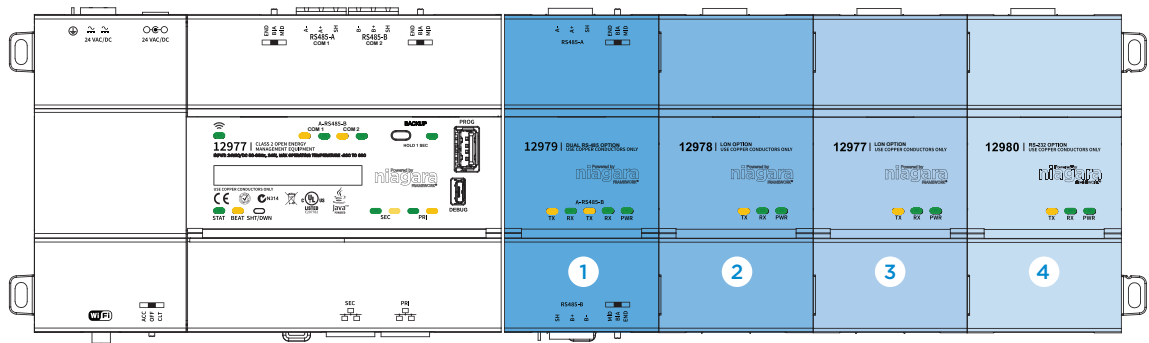

## MAXIMUM COMBINATIONS


| EXPANSION<br>1 | EXPANSION<br>2 | EXPANSION<br>3 | EXPANSION<br>4 |
|----------------|----------------|----------------|----------------|
| 232 or LON     | 232 or LON     | 232 or LON     | 232 or LON     |
| 485<br>485     | 232 or LON     | 232 or LON     | 232 or LON     |
| 485<br>485     | 485<br>485     | 232 or LON     |                |
| 485<br>485     | 485<br>485     |                |                |

*Expandability is dependent on the type of expansion module used*



# JACE® 9000 CONTROLLER MOUNTING & DIMENSIONS

- 1 JACE 9000 controller. Allow at least 1.5" (38mm) clearance around all sides and minimum 3" (76mm) at bottom for Wi-Fi antenna
- 2 Expansion module. Up to four (4) may be used.  
See "Expansion Module and IO Configurations"
- 3 Distances between center of tabs from one unit to another unit

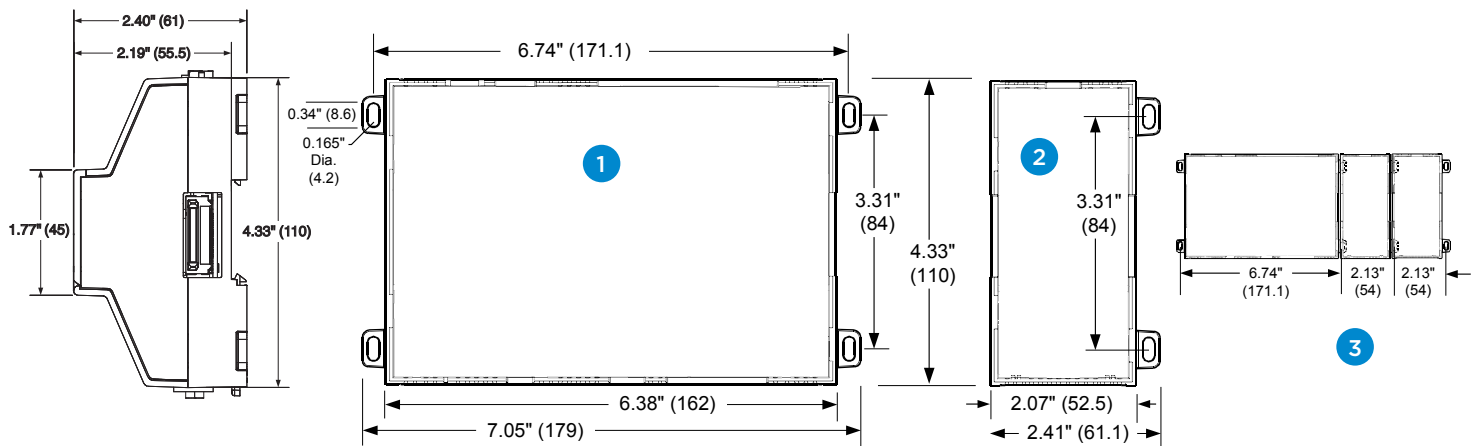

Compatible with (DIN43880) enclosures

Suitable for mounting to a panel or to an EN50022 standard 35mm rail

Vizio stencils available upon request

## AGENCY CERTIFICATIONS

- UL 916
- CE EN 61326-1
- RCM
- FCC Part 15 Subpart B, Class B
- FCC Part 15 Subpart C
- C-UL listed to Canadian Standards Association (CSA) C22.2 No. 205-M1983 "Signal Equipment"
- 1999/5/EC R&TTE Directive
- SRRC
- RSS
- RoHS

## ENVIRONMENTAL SPECIFICATIONS

- **Operating temperature:** -20-60°C
- **Storage temperature:** -40-85°C
- **Humidity:** 5%-95% — Non condensing
- **Shipping & vibration:** ASTM D4169, Assurance Level II
- **MTTF:** 10 years+

Contact [support@tridium.com](mailto:support@tridium.com)  
for the latest agency certifications  
or global shipping guide

## JACE® 9000 ORDERING INFORMATION

| Part number                 | Description   |
|-----------------------------|---|
| JACE-9000-CSE-001, 002, 005 | Base unit includes two isolated RS485 ports, two 10/100/1000MB Ethernet ports and Wi-Fi connectivity. Refer to the Global Shipping Guide for more country specific SKU  |
| JACE-9000-CSE-003           | Identical in form and function to standard JACE 9000 model without the Wi-Fi module and peripherals.  |
| JACE-9000-DEMO              | Base unit includes two isolated RS485 ports, two 10/100/1000MB Ethernet ports, Wi-Fi connectivity, all available Tridium drivers and a 500 device license. Hardware Accessories purchased separately. Available with Niagara Analytics (non-production only).           |
| NC-9XXX-DEMO                | JACE 9000 Demo with 500 Device Core. Includes all available <a href="#">Tridium Drivers</a> . Requires Niagara 4.13 or higher. Available with VYKON Integrated Analytics (non-production only). License will renew annually with the receipt of the annual support fee. |
| NC-9005                     | Up to 5 devices/250 point core  |
| NC-9010                     | Up to 10 devices/500 point core   |
| NC-9025                     | Up to 25 devices/1,250 point core   |
| NC-9100                     | Up to 100 devices/5,000 point core  |
| NC-9200                     | Up to 200 devices/10,000 point core   |
| DEVICE-10                   | Up to 10 devices/500 point upgrade (can be purchased during initial licensing)  |
| DEVICE-25                   | Up to 25 devices/1,250 point upgrade (can be purchased during initial licensing)  |
| DEVICE-50                   | Up to 50 devices/2,500 point upgrade (can be purchased during initial licensing)  |
| NPB-8000-2X-485             | JACE 8000 & 9000 controllers — add on dual port RS-485 module   |
| NPB-8000-LON                | JACE 8000 & 9000 controllers — add on single port LON FTT10A module   |
| NPB-8000-232                | JACE 8000 & 9000 controllers — add on single port RS-232 module   |
| WPM-8000                    | Universal power supply for JACE 8000 & 9000 controllers   |
| IO-R-16                     | Optional 16 point IO RS485 module designed for use with the JACE 8000 & 9000 — Includes 8 Universal Inputs, 4 Form A Relay Outputs and 4 0-10 VDC Analog Outputs  |
| IO-R-34                     | Optional 34 point IO RS485 module designed for use with the JACE 8000 & 9000 — Includes 16 Universal Inputs, 10 Form A Relay Outputs and 8 0-10 VDC Analog Outputs  |

The JACE 9000 controller is available through a wide variety of Niagara Community partners. Our open distribution business model and open protocol support allow a vendor-neutral application compatible with devices and systems throughout the world. Contact your VYKON partner today to get started.

Contact your VYKON partner today to get started.



[vykon.com](https://vykon.com)

© 2025 Tridium Inc. All rights reserved. All other trademarks and registered trademarks are properties of their respective owners.

Information and/or specifications published here are current as of the date of publication of this document. Tridium, Inc. reserves the right to change or modify specifications without prior notice. The latest product specifications can be found by contacting our corporate headquarters, Richmond, Virginia. Products or features contained herein may be covered by one or more U.S. or foreign patents. This document may be copied only as expressly authorized by Tridium in writing. It may not otherwise, in whole or in part, be copied, photocopied, reproduced, translated, or reduced to any electronic medium or machine-readable form.

2025-0009VK